


TILE ROOF Whirlybird FROM LOMANCO




Tile Roof Turbine Features:

- Approved for all tile and slate roof constructions.
- Permanently lubricated upper and lower ball bearings that ensure long life and no maintenance.
- All-aluminum rust-free construction.
- Rigid spider-type structure.
- Riveted at every connection.
- 21 air-foil curved vanes with rolled vane edges to deflect water.
- Exclusive vari-pitch base adjusts to 12/12 roof pitch.
- Large flashing for easy installation.
- Tested to withstand winds of 147 m.p.h.
- Forever Guarantee - residential use only.
- Easy installation.

Tile Roof Turbine Specifications

Model Number	Colors Available	CFM AT WIND VELOCITY OF			Number Per Carton	Weight Per Carton (lbs.)
		5 MPH	8 MPH	15 MPH		
BIB-12TR	Mill, White, Brown, Black, & Weathered Bronze	347	542	962	1	6 ³ / ₄
BEB-12TR		347	542	962	1	6 ³ / ₄

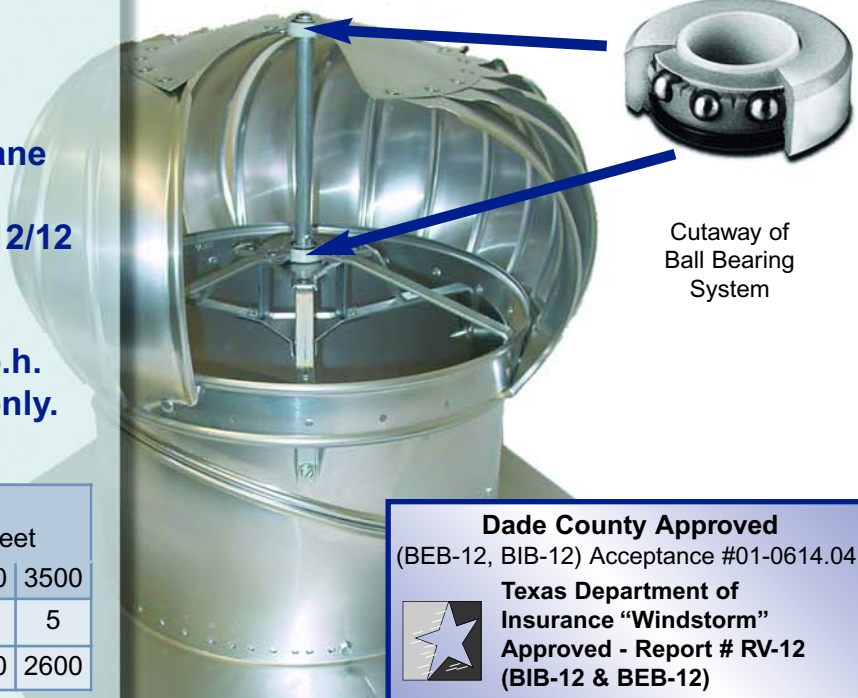

Cutaway of Ball Bearing System

Tile Roof Turbine Ventilation Guide						
(Attic floor space) in square feet						
Area Ventilated	1000	1500	2000	2500	3000	3500
Required Vents	2	2	3	4	4	5
Intake Required(in ²)	1040	1040	1560	2080	2080	2600

Dade County Approved
(BEB-12, BIB-12) Acceptance #01-0614.04
Texas Department of Insurance "Windstorm" Approved - Report # RV-12 (BIB-12 & BEB-12)