


# ADJUSTABLE ROOF FLASHING

---

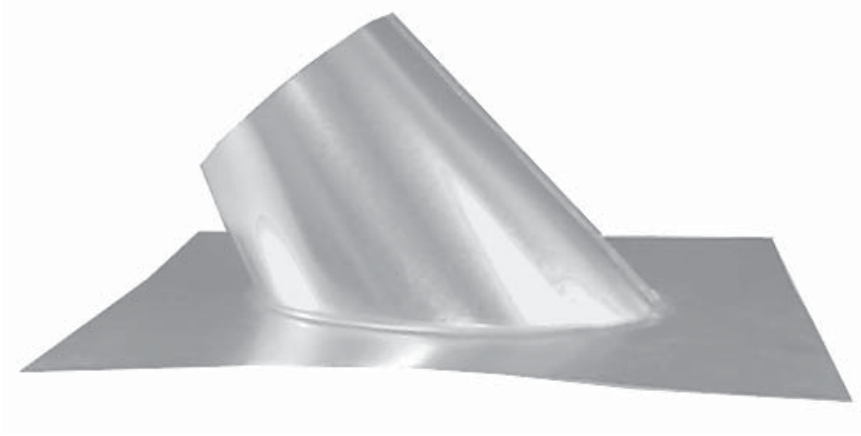

## HELPS PROVIDE WEATHER TIGHT PIPE PENETRATIONS OF THE ROOF

- ◆ Adjustable to fit slope of roof.
- ◆ No field trimming required.
- ◆ Helps provide proper alignment of pipe.
- ◆ All weatherproof seams.
- ◆ Heavy gauge galvanized construction
- ◆ Large flanges.
- ◆ Available for gas vent pipe also.



---

***FRESH AIR MANUFACTURING CO.***

*Technologies in Ventilation*

649 N. Ralstin St., Meridian, ID 83642 \* (208)884-8931 \* 800-234-1903 \* FAX: (208)884-8943




# ADJUSTABLE ROOF FLASHING



## OPTIONS:

Available in Galvanized Steel, Aluminum, Stainless Steel or Copper.

ROOF FLASHINGS SELECTION GUIDE				
Pipe Size	0 to 6/12 Pitch	0 to 8/12 Pitch	Steep Pitch 7/12 to 12/12	Flat Pitch
3"		G 3	GH 3	FP 3
4"		G 4	GH 4	FP 4
5"		G 5	GH 5	FP 5
6"		G 6	GH 6	FP 6
7"		G 7	GH 7	FP 7
8"		G 8	GH 8	FP 8
9"	G 9		GH 9	FP 9
10"	G 10		GH 10	FP 10
12"	G 12		GH 12	FP 12
14"	G 14		GH 14	FP 14
16"	G 16		GH 16	FP 16
18"	G 18		GH 18	FP 18

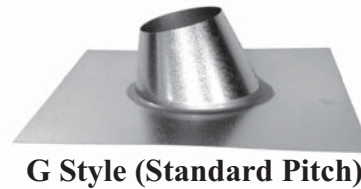

G Style Flashing										
Size	A	B	C	D	E	F	G	H	I	J
3"	15	15	5.5	4.75	5.5	4.75	3	4.75	7.25	3
4"	15	15	6.5	4.25	6.5	4.25	4	4.25	6.75	3
5"	16	16	8	4	8	4	5	4	7	3
6"	18	18	9.5	4.25	9.5	4.25	6	4.25	7.75	4
7"	20	20	10.5	4.75	10.5	4.75	7	4.75	8.25	4
8"	20	20	12	4	12	4	8	4	8	4
9"	20	20	12.5	3.75	12.5	3.75	9	3.75	7.25	4
10"	22	22	13.5	4.25	13.5	4.25	10	4.25	7.75	4
12"	24	24	16	4	16	4	12	4	8	5
14"	30	30	19	5.5	19	5.5	14	5.5	10.5	5
16"	34	34	20.5	6.75	20.5	6.75	16	6.75	11.25	6
18"	34	34	23.5	5.25	23.5	5.25	18	5.25	10.75	6



**FRESH AIR MANUFACTURING CO.**  
*Technologies in Ventilation*